

MILLENNIUM SERIES



E012G1L Series



E022G1L Series



F036G1L Series



F050G1L Series



G065G1L Series



G090G1L Series



H115G1L Series

The Millennium Series of Progressive Cavity Pumps are a Heavy-Duty cast pump that is ideal for industrial applications such as crude oils, mineral processing, waste sludge and slurries and heavy polymers and detergents.

Its robust construction allows for up to 25' of suction lift while its pumping action remains delicate enough for minimal shear to pumped materials.

The Millennium Series offers true versatility with multi-directional pumping capability by being able to be run in either direction while its heavy-duty internal components are designed for optimal service during its operation.

Contact a Liberty Process Equipment representative today for more information about how the Millennium Series can be your solution.

GPM (Max)	Single Stage 0-90 PSI	Dual Stage 90-180 PSI
88	1E012G1L	2E012G1L
158	1E022G1L	2E022G1L
222	1F036G1L	2F036G1L
285	1F050G1L	2F050G1L
370	1G065G1L	2G065G1L
435	1G090G1L	2G090G1L
565	1H115G1L	2H115G1L
742	1J175G1L	2J175G1L



Dimensions



Standard Pump Dimensions

Model	Standard Pump Dimensions						Suction Flange	Discharge Flange		Approx. Weight	
	A	B	C	D	E	F	Size	M	Size	M1	lbs.
1E012G1L	42	16	6	12	1-7/8	8	4	9	4	9	300
2E012G1L	53	27	6	12	1-7/8	8	4	9	4	9	325
1E022G1L	43	17	6	13	1-7/8	8	6	11	6	11	330
2E022G1L	56	30	6	13	1-7/8	8	6	11	6	11	370
1F036G1L	49	20	7	14	2-1/8	10	6	11	6	11	490
2F036G1L	63	34	7	14	2-1/8	10	6	11	6	11	560
1F050G1L	54	25	7	14	2-1/8	10	6	11	6	11	520
2F050G1L	74	45	7	14	2-1/8	10	6	11	6	11	610
1G065G1L	57	24	9	18	2-3/8	12	8	14	8	14	760
2G065G1L	75	42	9	18	2-3/8	12	8	14	8	14	882
1G090G1L	64	30	9	18	2-3/8	12	8	14	8	14	805
2G090G1L	89	56	9	18	2-3/8	12	8	14	8	14	960
1H115G1L	67	31	11	20	2-7/8	15	8	14	8	14	1110
2H115G1L	90	54	11	20	2-7/8	15	8	14	8	14	1185

*1J175G1L & 2J175G1L Information Not Displayed



Liberty Process Equipment, Inc. 2525 South Clearbrook Drive
Arlington Heights, IL 60005 Ph. (847)-640-7867
Fx. (847)-640-7855 Email: sales@libertyprocess.com

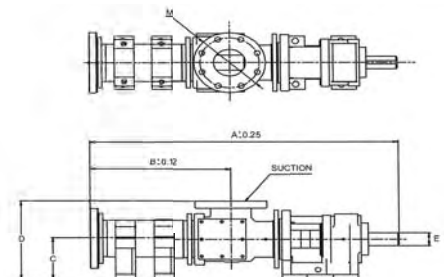

Capacity: Up to 742 GPM
Pressure: Up to 180 PSI
Temperature: 20 deg. F up to 350 deg. F